


MANIACCESS

171 AET

Double reach

1 machine : 2 load charts for more versatility !

- S.W.L. :
 - 1 person or 150 kg at 17 m
 - 2 people or 230 kg at 15 m
- Working height : 17 m or 15 m
- Maximum outreach : 11 m or 9 m
- Turret rotation : 355°
- Electric drive : 48 V

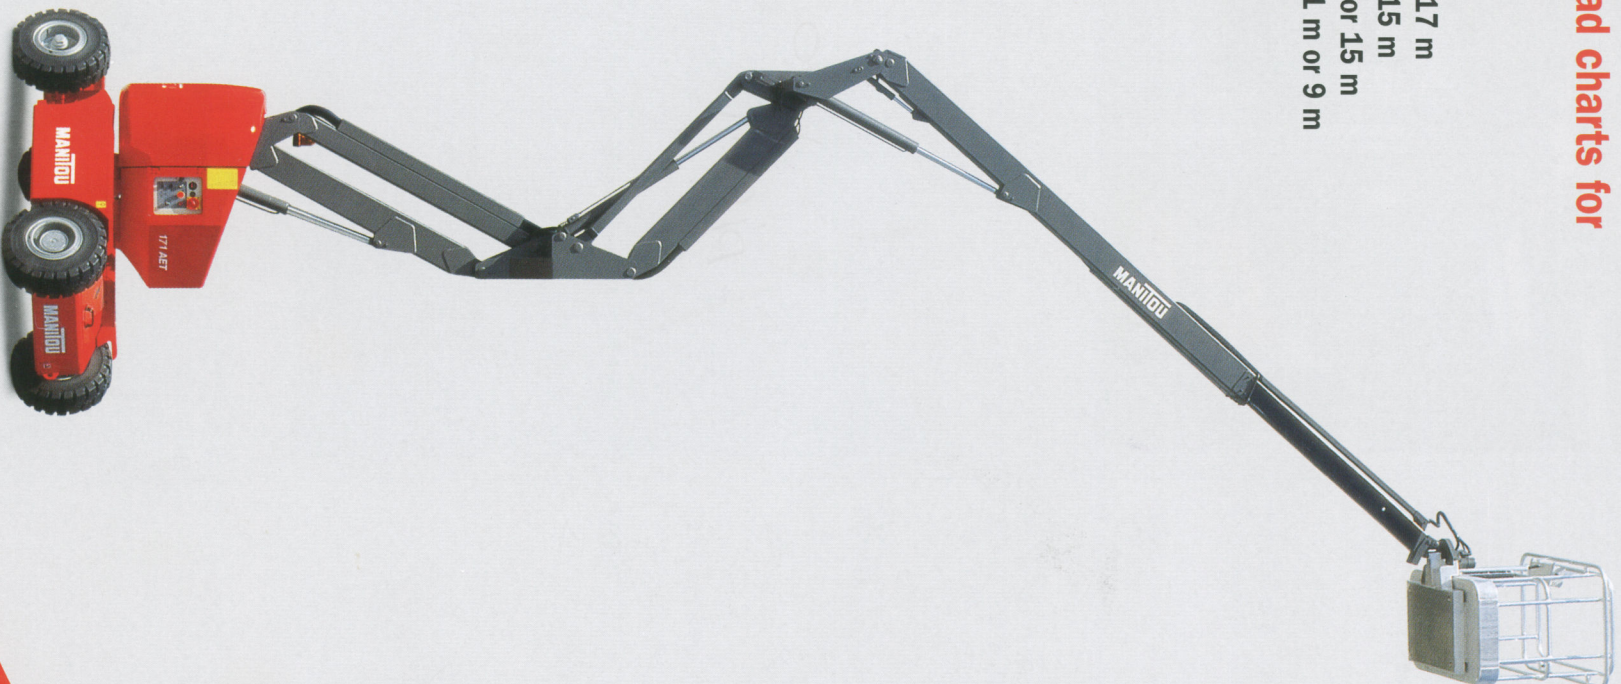

171 AET *Double reach*

S.W.L.*
 150 kg including 1 person at 17 m
 230 kg including 2 people at 15 m
 Inside/outside use wind 45 km/h

Working height 17 m
Platform height 15 m

Overall length 6,46 m
Overall width 1,50 m
Overall height 1,95 m
Basket size 1,30 x 0,95 m
Max.outreach/ up and over clearance 11 m/5 m
 9 m/5 m
Ground clearance 15 cm

Travel speed 0 to 3,3 km/h
Number of speeds 2

Basket rotation 180°
Turret rotation 355°
Turning radius inside/outside 1,50/3,60 m

Traction battery 48 V - 450 Ah (C5)
Integrated charger 48 V - 560 Ah (C20)
 48 V - 45 A

Gradeability 22%
Max. slope accepted 5° or 3%

Hydraulic tank 18 l.

Tires PPS 27-10 x 12

Weight 7500 kg

Standard equipment


- Proportional controls
- Oscillating steering axle
- Max. travel speed up to 1,5 m platform height
- Differential lock
- Negative brakes
- Lifting brackets
- Hourmeter
- 230 V predisposal
- Low voltage indicator

Options


- Working light
- Flashing beacon
- All motion alarm
- Non marking tyres
- Airline and water in the basket
- Battery centralized filling
- 230 V plug with differential reverse current relay
- Extreme cold condition model -30° C

*According to selection

This publication in no way constitutes an offer and the company reserves the right to alter specifications without prior notice.

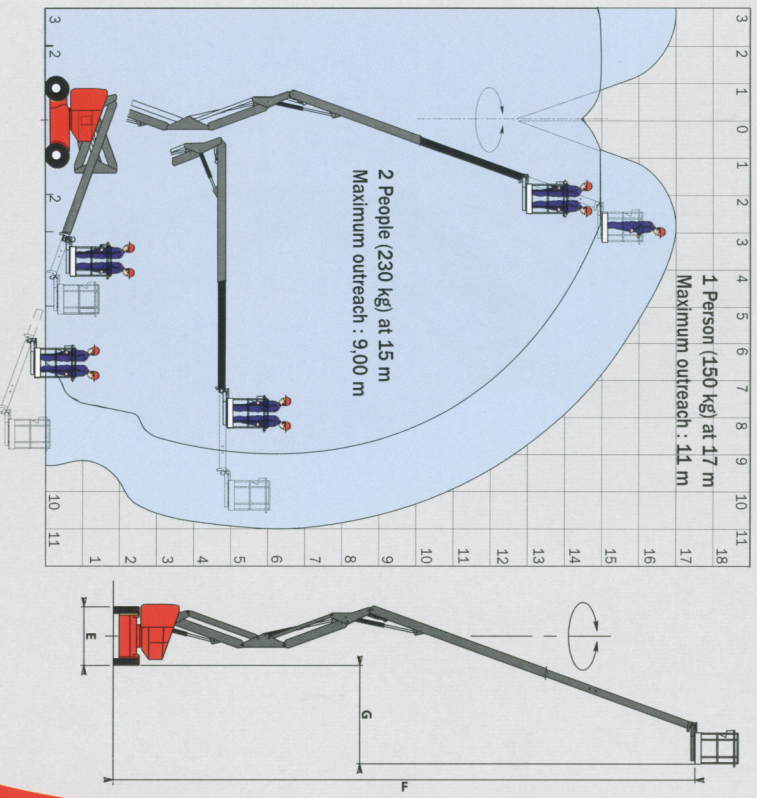

A	6460
B	1800
C	1950
D	150
E	1500
F	15000
G	2520

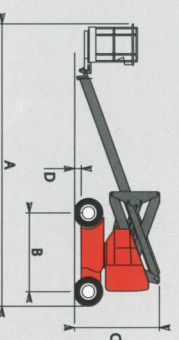

01/01/2004

MANTOU B.F.S.A.
 B.P.249 - 44158 ANGENIS CEDEX - FRANCE
 TEL : 33 2 40 09 10 11
 EXPORT DEPARTMENT FAX : 33 2 40 09 10 97
 www.mantou.com