

# 230 CTJ

- Working height : 23 m
- Load capacity : 227 kg
- Max. offset : 18.30 m
- Diesel engine Isuzu 55 HP
- ROUGH TERRAIN
- Gradeability : 48%



**MANIACCESS**

CE



# 230 CTJ



**Load capacity** .....227 kg



**Working height** .....23 m

**Platform floor height** .....21 m

**Maximum offset** .....18.30 m



**Max.travel speed** .....2.0 km/h



**Gradeability** .....48%



**Diesel engine** .....Isuzu 4JB1

**Power at 2200 rpm** .....44 kw



**Transmission**Hydrostatic



**Capacities**

Hydraulic oil .....150 l

Fuel tank .....150 l



**Length** .....11.57 m

**Width** .....2.46 m

**Height** .....2.35 m

**Platform size** .....1.80 X 0.75 m

**Turret rotation** .....continuous

**Basket rotation** .....180°

**Jib movement** .....140°




**Ground clearance (under chassis)** .....42.5 cm



**Weight** .....15200 kg

**Standard equipments :**

- H/V control (for horizontal and vertical movement)
- Sandblast protection
- Travel speed control
- Rotation speed control
- Lifting speed control
- All motion alarm
- Lever protection
- 220 V predisposal in the basket

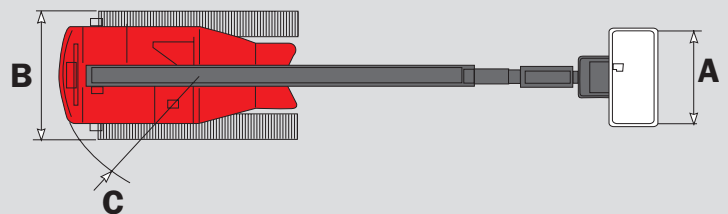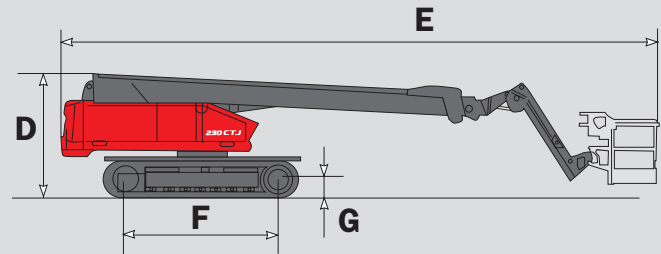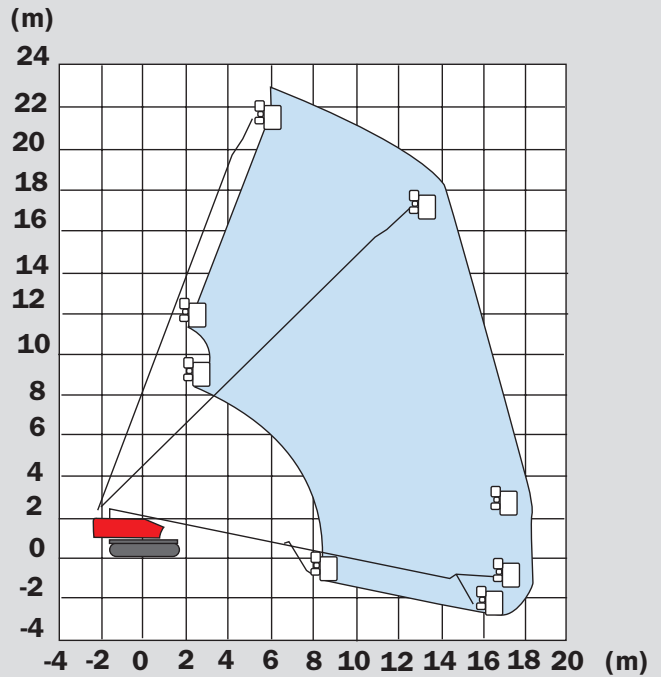

A	1800
B	2460
C	1130
D	2350
E	11570
F	2575
G	425

mm

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice. The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments



**MANITOU B.F. S.A.**

B.P. 249 - 44158 ANCENIS CEDEX - FRANCE  
 TEL : 33 2 40 09 10 11  
 EXPORT DEPARTMENT FAX : 33 2 40 09 10 97  
 www.manitou.com