



**Electric  
Self-Propelled  
Scissor Lift**

**GS™-2032**

A stable, reliable  
and easy to operate  
lift with a built-in  
platform extension.



**Genie Industries**



# GS-2032

## GS-2032

- The solid steel deck platform has a **slip-resistant surface**.
- Heavy duty square steel guardrails **maximise durability**.
- **Lubrication-free, service-free pivot points.**
- **Built-in lanyard attachment points.**
- Weather resistant, impact resistant, injection-molded **Joystick Carrier / Controller box** operates from the platform or the ground.
- **Low noise level** allows operation in quiet work environments.
- High angle steering provides **excellent manoeuvrability**.
- Swing-out battery box and power module allow **easy access to componentry**.

- Variable speed motor **extends battery and motor life** by using only the energy needed to do the required work.
- On-board troubleshooting diagnostics **notify the operators of possible fault conditions**.

### Standard Features

- GS-2032 has 8.1 m (26 ft) working height
- 1 m (39 in) roll-out platform extension
- Compact 81 cm (32 in) width
- 363 kg (800 lb) lift capacity
- Proportional controls for lift and drive functions
- Automatic 25 amp battery charger
- Manual platform lowering valve
- Emergency stop switches at both platform and ground controls
- Drive speed interlock limits speed while elevated
- Multiple disc brakes provide smooth deceleration
- Manual brake release
- Pothole guards
- Non-marking tyres
- AC wiring to platform
- Tilt sensor with an audible alarm
- Beeper horn
- Hour meter

### Options and Accessories


- Motion alarm
- Platform swing gate
- Air line to platform
- EE rating
- Dual flashing beacon
- Pipe cradle
- Power inverter
- Automotive horn
- Folding guardrails with platform swing gate
- Maintenance-free batteries

### Standards Compliance

- CE EN280

### Occupancy

- Indoor: 2 persons
- Outdoor: 1 person

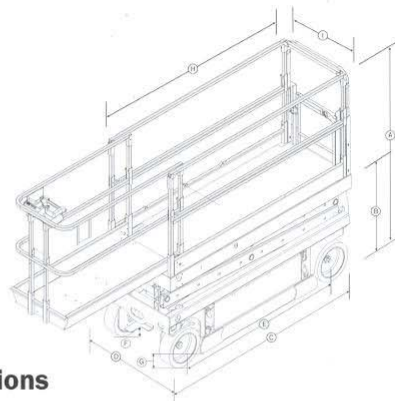

## Specifications

Model	GS-2032	
	<b>Metric</b>	<b>US</b>
Working height*	8.1 m	26 ft
Platform height	6.1 m	20ft
Sliding rail design (standard)		
(A) Height stowed, CE	2.11 m	83 in
Height stowed, rails lowered	1.93 m	76 in
Fold down rail design (optional)		
Height stowed	2.11 m	83 in
Height stowed, rails folded	1.73 m	68 in
Platform height - stowed	98 cm	38 1/2 in
(B) Length - stowed	2.44 m	96 in
(C) Width	81 cm	32 in
(D) Wheelbase	1.85 m	73 in
(E) Ground clearance - at machine centre	10 cm	4 in
(F) Ground clearance - pothole guards deployed	2 cm	7/8 in
(G) Platform length	2.26 m	89 in
(H) Platform width	79 cm	31 in
(I) Platform length extended	3.25 m	128 in
Guardrail height CE	1.1 m	43 in
Toeboard height	15 cm	6 in
Lift capacity	363 kg	800 lb
Extension deck lift capacity	113 kg	250 lb
Turning radius outside	2.34 m	92 in
Turning radius inside	zero	
Power source	24V (4 6V 245AH batteries)	
Drive speed - stowed	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph
Raise/lower speed	30/26 sec	
Controls	24V DC proportional	
Tyres (solid rubber)	38 x 13 x 28 cm	15 x 5 x 11 in
Gradeability	30%	30%
Drive	dual front wheel	
Multiple disc brakes	dual rear wheel	
Weight **	1,589 kg	3,503 lb

\*The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Weight will vary depending on options and/or country standards.

Distributed By:

## Genie Industries

**GENIE UNITED KINGDOM**  
The Maltings, Wharf Road  
Grantham, Lincolnshire  
NG31 6BH, England  
Telephone +44 (0)1476 584333  
Fax +44 (0)1476 584334  
<http://www.genielift.com>

**GENIE UNITED STATES**  
18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730  
Telephone +1 (425) 881 1800  
Fax +1 (425) 883 3475  
<http://www.genielift.com>

For further information, please contact your local distributor or the Genie sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie GS-2032 Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie GS-2032, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 1997 by Genie Industries. "Genie" is a Registered Trademark of Genie Industries in the USA and many other countries. "GS" is a Trademark of Genie Industries. Genie is the owner of U.S. Patent 6,050,358. 01/03 Part No. B65032UK.