



**Electric
Self-Propelled
Scissor Lift**

GS™-2632

○ Its narrow width allows access in hard-to-reach spots. Fits through a standard doorway.



Genie Industries

GS-2632

GS 2632

- 90-degree steering provides zero turning radius and **excellent manoeuvrability**.
- Narrow aisle access 81.3 cm (32 in)
- On-board troubleshooting diagnostics **notify the operators of fault conditions**.
- Variable speed motor extends battery and motor life by using only the energy needed to do the required work.
- Weather resistant, impact resistant, injection-molded **Joystick Carrier/Controller box** operates from the platform or the ground.
- The solid steel deck platform has a **slip-resistant surface**.
- Heavy duty square steel guardrails fold down quickly without tools for **increased accessibility**.

- **Low noise level** allows operation in quiet work environments.
- Swing-out battery box and power module allow **easy access to componentry**.
- **Lubrication-free, service-free pivot points**.

Standard Features

- GS-2632 has 9.92 m (32 ft) working height
- 1 m (39 in) roll-out platform extension
- Compact 81.3 cm (32 in) width
- 227 kg (500 lb) lift capacity
- Proportional controls for lift and drive functions
- Automatic 25 amp battery charger
- Manual platform lowering valve
- Emergency stop switches at both platform and ground controls
- Drive speed interlock limits speed while elevated
- Multiple disc brakes provide smooth deceleration
- Manual brake release
- Pothole guards
- Non-marking tyres
- AC wiring to platform
- Tilt sensor with an audible alarm
- Beeper horn
- Hour meter

Options and Accessories


- Motion alarm
- Power inverter
- Platform swing gate
- Air line to platform
- Dual flashing beacons
- Automotive horn
- Maintenance-free batteries

Standards Compliance

- CE EN280

Occupancy

- Indoor: 2 persons
- Outdoor: 1 person

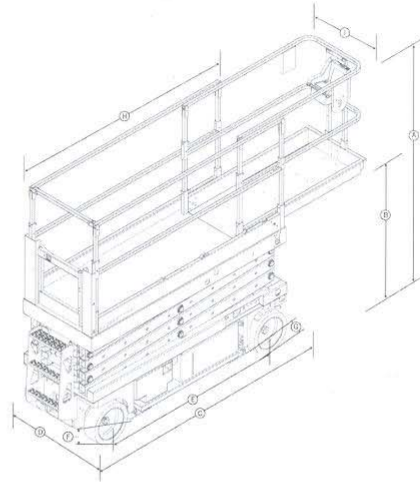

Specifications

Model	GS-2632 Metric	US
Working height*	9.92 m	32 ft
Platform height	7.92 m	26 ft
(A) Height stowed	2.29 m	90 in
Height stowed, rails folded	1.92 m	75.5 in
(B) Platform height - stowed	1.17 m	46.1 in
(C) Length - stowed	2.44 m	96 in
Length - platform extended	3.44 m	135 in
(D) Width	81.3 cm	32 in
(E) Wheelbase	1.85 m	73 in
(F) Ground clearance - at machine center	10.2 cm	4 in
(G) Ground clearance - pothole guards deployed	2.2 cm	7/8 in
(H) Platform length	2.26 m	89 in
(I) Platform width	79 cm	31 in
Platform length extended	3.25 m	128 in
Toeboard height	15 cm	6 in
Lift capacity CE	227 kg	500 lb
Extension deck lift capacity	113 kg	250 lb
Turning radius outside	2.34 m	92 in
Turning radius inside	zero	
Power source	24V (4 6V 245AH batteries)	
Drive speed - stowed	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph
Raise/lower speed	37/24 sec	
Controls	24V DC proportional	
Tyres (solid rubber, non-marking tyres)	38 x 12.7cm	15 x 5 in
Gradeability	25%	25%
Drive	dual front wheel	
Multiple disc brakes	dual rear wheel	
Weight	2,336 kg	5,150 lb

*The metric equivalent of working height adds 2 m to platform height. Imperial adds 6 ft to platform height.

*Weights will vary depending on options and/or country standards.

Distributed By:

Genie Industries

GENIE UNITED STATES
18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone +1 (425) 881-1800
Fax +1 (425) 883-3475
<http://www.genieindustries.com>

GENIE UNITED KINGDOM
The Maltings, Wharf Road
Grantham
Lincolnshire NG31 6BH
England
Telephone +44 (0)1476 584333
Fax +44 (0)1476 584334
<http://www.genieindustries.com>

For further information, please contact your local distributor or the Genie sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie GS-2632 Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie GS-2632, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 2001 by Genie Industries. "Genie" is a Registered Trademark of Genie Industries in the USA and many other countries. Genie is a Terex company. "GS" is a Trademark of Genie Industries. Genie is the owner of U.S. Patent 6,050,358; 07/03. Part No. 882188UK