

**Manually  
Operated  
Super Tower™**

**SUPER TOWER™**

Lifts and supports  
lighting systems,  
sound systems and  
stage scenery.



**Genie Industries**

# SUPER TOWER™

## The Ideal Stage Hand!


With an **800 lb (363 kg)** or **650 lb (295 kg)** load capacity, the Genie Super Tower is the ideal tool for lifting and supporting **lighting systems, sound systems and stage scenery**. Depend on it for flawless theatrical productions and entertainment events.

### Standard Features

- The Super Tower can be used as a single unit, or two or more can be used together to support trusses to span a stage.
- **Setup is easy.** Just install the outriggers and set the leveling jacks.
- To ensure load stability, **the hand winch locks the load in place** when the handle is released.
- In a stowed position, the Super Tower is **easy to transport**—with no bulky base to get in the way.
- It comes standard with a **flat black anodized finish** so that the unit is nearly invisible to the audience.
- Perfect for heavy lighting systems.
- Lifts 800 lb (363 kg) to 19 ft 6 in (5.94 m) or 650 lb (295 kg) to 24 ft 4 in (7.42 m).
- **Compact base.** Stowed dimensions are 22 in (56 cm) x 25 1/4 in (64 cm).

### Options and Accessories

- One- or two-speed winch
- Load platform
- Fork extensions

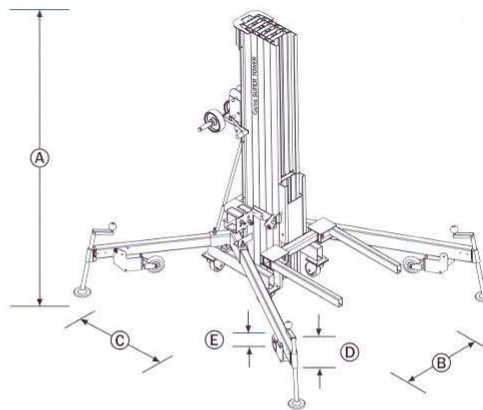

### Specifications

Model	ST-20 US	Metric
(A) Height - stowed	78 3/4 in	2 m
(B) Width - stowed	22 in	56 cm
(C) Length - stowed	25 1/4 in	64 cm
(D) Minimum load height	6 in	15 cm
(E) Ground clearance	2 in	5 cm
Outrigger footprint	73 1/2 x 79 1/2 in	1.87 x 2.02 m
Load capacity - at 18 in load center	800 lb	363 kg
Weight	446 lb	202 kg
Average winch cranks	8 1/2/ft	28/m
Adjustable forks	27 1/2 x 11 1/2 to 30 x 2 1/2 in	70 x 29 to 76 x 6 cm
Adjustable forks weight	52 1/2 lb	24 kg
Working height - forks down	19 ft 6 in	5.94 m
Working height - forks up	21 ft 2 1/2 in	6.46 m
Model	ST-25	
(A) Height - stowed	78 3/4 in	2 m
(B) Width - stowed	22 in	56 cm
(C) Length - stowed	25 1/4 in	64 cm
(D) Minimum load height	6 in	15 cm
(E) Ground clearance	2 in	5 cm
Outrigger footprint	73 1/2 x 79 1/2 in	1.87 x 2.02 m
Load capacity - at 18 in load center	650 lb	295 kg
Weight	490 lb	222 kg
Average winch cranks	8 1/2/ft	28/m
Adjustable forks	27 1/2 x 11 1/2 to 30 x 2 1/2 in	70 x 29 to 76 x 6 cm
Adjustable forks weight	52 1/2 lb	24 kg
Working height - forks down	24 ft 4 in	7.42 m
Working height - forks up	26 ft 1/2 in	7.94 m

Distributed By:

## Genie Industries

### GENIE UNITED STATES

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730  
Telephone (425) 881-1800  
Toll Free in USA/Canada 800-536-1800  
Fax (425) 883-3475  
<http://www.genieindustries.com>

### GENIE UNITED KINGDOM

The Maltings, Wharf Road  
Grantham  
Lincolnshire NG31 6BH  
England  
Telephone: +44 (0)1476 584333  
Fax: +44 (0)1476 584334  
<http://www.genieindustries.com>

For further information, please contact your local distributor or the Genie sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie Super Tower Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie Super Tower, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 1997 by Genie Industries. Printed in the U.S.A. on recyclable paper. "Genie" and "Super Tower" are Registered Trademarks of Genie Industries in the USA and many other countries. ST 5K 0503C. Part No. 65012