



**Manually
Operated
Superlift™
Advantage**

SLA

○ Material lift
for construction
and industrial
applications.



Genie Industries

The Superlift™ Advantage

The Genie Superlift Advantage is a package of options you select to design the Superlift you need and want... and you get more value for your money.

It's easy:

1. Choose the base and mast—either Standard Base with five different lifting heights—or Straddle Base with three different lifting heights.
2. Choose the load handling attachments you need.



Standard Base: Available in 1.5, 3, 4.6, 6.1 and 7.6 m (5, 10, 15, 20 and 25 ft) heights. The field-proven design ensures durability and dependability. The welded steel base provides extra support. Stabilisers are standard on 6.1 and 7.6 m (20 and 25 ft) models. There are no loose parts.



Straddle Base: Available in 1.5, 3 and 4.6 m (5, 10 and 15 ft) heights. The straddle base design is versatile and adjustable. It's easy to use and straddles loads from 56 cm to 1.27 m (22 to 50 in) wide. It's perfect for wide loads and narrow doorways. Easily handles pallets up to 1.2 m (48 in) wide. The straddle base models are built with the same durable construction used with the standard base models. Flat forks permit ground level loading.

EASILY STORED - HIGHLY MANOEUVRABLE



Easy to store because legs fold up and attachments are removable.

Rolls through standard doorways in the upright position, without removing the load or having to tilt back the lift.



Easily loads into a pickup truck to move from one location to another.

Manoeuvrable 10 cm (4 in) front casters and 13 cm (5 in) rear casters with 4-way swivel locks and side brakes are standard.


LOAD HANDLING ATTACHMENTS



Standard Forks: excellent for general purpose lifting applications. Invertible: forks may be inverted to add an additional 51 cm (20 in) of lifting height. Standard.



Adjustable Forks: forks may be inverted to add an additional 51 cm (20 in) of lifting height. Ideal for odd-sized loads. Optional.



Flat Forks: strong aluminium construction, designed for standard pallets. Provides an inexpensive alternative to forklifts for material lifting and transportation. For use on SLA-5, SLA-10 and SLA-15 models. Optional.



Boom: transforms your Superlift into a vertical crane or hoist. Positions tooling fixtures, hoists circuit breakers, engines, etc. Optional.

ACCESSORIES FOR STANDARD AND ADJUSTABLE FORKS



Pipe Cradle: perfect for HVAC and construction applications—no tools required to install or remove. For use with standard or adjustable forks.

Fork Extension (not shown): insert onto standard or adjustable forks for additional lengths of up to 64 cm (25 in).




Load Platform: fits easily over standard or adjustable forks—no tools required to install or remove. Assists in loading and unloading heavy objects.



Rear Transport Wheels: provide easy manoeuvrability over uneven surfaces.



Captive Stabilisers: patented "locking system" provides additional lateral support for heavy loads. Standard on SLA-20 and SLA-25 units.

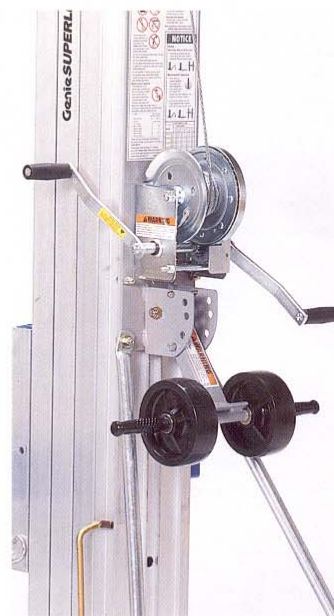

One-Speed Winch: manually operated winch incorporates a silent ratchet system.

For further information, please contact your local distributor or the Genie Sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie Superlift Advantage Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie Superlift Advantage, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 1997 by Genie Industries. "Genie" and "Superlift" are Registered Trademarks of Genie Industries in the U.S.A. and many other countries. Genie is the owner of US Patents: 5,584,363; 5,515,945; 5,667,352. Patents Pending, 01/03 Part No. B65010UK