Manually Operated Superlift™ Contractor

SLC™

Portable material lift for construction and industrial applications.

Genie Industries

SLC™

The Superlift Contractor is an ideal tool for construction firms and every kind of contractor.

Standard Features

- Heavy duty design, yet lightweight and portable.
- Quick setup requires no tools.
- Loads easily into a pickup truck for transporting.
- Rear transport wheel assembly.
- 10 cm (4 in) front casters and 13 cm (5 in) rear casters with side brakes are standard.
- Hold-down bar holds mast assembly in place during transport.

Options and Accessories

- Fixed front caster option
- Two-speed winch
- Stabilizer set (standard on SLC-18 and SLC-24)

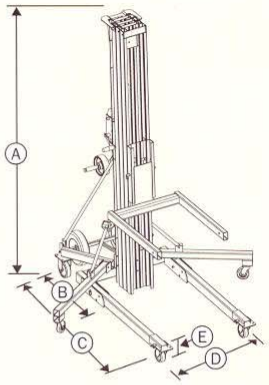

Specifications

Model	SLC-12 Metric	SLC-12 US	SLC-18 Metric	SLC-18 US	SLC-24 Metric	SLC-24 US
Ⓐ Height - stowed	2.18 m	86 in	2.18 m	86 in	2.18 m	86 in
Ⓑ Length - stowed	86 cm	34 in	86 cm	34 in	86 cm	34 in
Ⓒ Length - operating	1.6 m	63 in	1.85 m	73 in	2.06 m	81 in
Ⓓ Width	80 cm	31½ in	80 cm	31½ in	80 cm	31½ in
Width-stabilizers lowered	1.68 m	66 in	1.68 m	66 in	1.68 m	66 in
Ⓔ Ground clearance	5 cm	2 in	5 cm	2 in	5 cm	2 in
Load height - min	15 cm	6 in	15 cm	6 in	15 cm	6 in
Weight - standard base	93 kg	204 lb	139 kg	307 lb	170 kg	374 lb
Average cranks						
-Standard winch	27.8 /m	8½/ft	27.8 /m	8½/ft	27.8 /m	8½/ft
-Two-speed winch, high	13.1 /m	4 /ft	13.1 /m	4 /ft	13.1 /m	4 /ft
-Two-speed winch, low	49.2 /m	15 /ft	49.2 /m	15 /ft	49.2 /m	15 /ft
Load Capacity						
14 in (36 cm) load centre	295 kg	650 lb	295 kg	650 lb	295 kg	650 lb
24 in (61 cm) load centre	193 kg	425 lb	193 kg	425 lb	193 kg	425 lb
42 in (1.07 m) load centre	82 kg	180 lb	73 kg	160 lb	73 kg	160 lb
Working Height						
Standard forks						
forks down	3.4 m	11 ft 2 in	5.1 m	16 ft 9 in	6.78 m	22 ft 3 in
forks up	3.94 m	12 ft 11 in	5.64 m	18 ft 6 in	7.32 m	24 ft
Adjustable forks						
forks down	3.4 m	11 ft 2 in	5.1 m	16 ft 9 in	6.78 m	22 ft 3 in
forks up	3.94 m	12 ft 11 in	5.64 m	18 ft 6 in	7.32 m	24 ft
Boom	3.7 m	12 ft 2 in	5.41 m	17 ft 9 in	7.1 m	23 ft 3 in

Load Handling Attachments	Length		Width		Depth		Weight	
Standard forks	71 cm	28 in	58 cm	23 in	6 cm	2½ in	12 kg	26½ lb
Adjustable forks	70 cm	27½ in	28 to 76 cm	11 to 30 in	6 cm	2½ in	24 kg	52½ lb
Fork extensions (each)	76 cm	30 in	5 cm	2 in	8 cm	3 in	2 kg	4½ lb
Boom	46 to 107 cm	18 to 42 in	4 cm	1½ in	15 cm	6 in	16 kg	34½ lb
Pipe cradle	70 cm	27½ in	61 cm	24 in	15 cm	6 in	4.5 kg	10 lb
Load platform	67 cm	26¼ in	58 cm	23 in	6 cm	2½ in	12 kg	26½ lb

Distributed By:

Genie Industries

GENIE UNITED KINGDOM
The Maltings, Wharf Road
Grantham
Lincolnshire NG31 6BH
England
Telephone **(44) 01476-584333**
Fax (44) 01476-584334
http://www.genielift.com

GENIE UNITED STATES
18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone **+1 (425) 881-1800**
Fax +1 (425) 883-3475
http://www.genielift.com

For further information, please contact your local distributor or the Genie sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie SLC Operator s Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator s Manual when using a Genie SLC or to otherwise act irresponsibly, may result in serious injury or death. Copyright ' 1997 by Genie Industries. Genie, Superlift and Superlift Contractor are Registered Trademarks of Genie Industries in the USA and many other countries. Genie is the owner of U.S. Patents: 5,584,363, 5,515,945, 5,667,352, 5,645,142 and Patents Pending. 12/02. Part No. B65011UK.