



**Portable
Telescoping
Pneumatic
Hoist**

SUPER HOIST™

- Lightweight, portable material lift powered by CO₂ or compressed air.



Genie Industries

SUPER HOIST™

Standard Features

- **The Super Hoist sets up in seconds.** No special tools are required. The legs fold out from the base for quick and easy set up.
- **The one-piece platform** attaches to the cylinder with a twist of the wrist. When not in use, the hose stores easily around brackets underneath the platform.
- **Captive legs** complete the streamlined design of the patented base assembly. Easy-to-release safety lock mechanisms keep each leg "up" for storage or "out" for use. Casters lock in place with a touch from your toe.
- **Easy to operate.** Up and down functions, including

the dump valve, can all be activated from the patented control handle. When not in use, the pistol-grip handle conveniently clips to a storage button on the side of the cylinder.


- **The Super Hoist is powered by either CO₂ or compressed air.**
- **Any bottle will do.** The "one size fits all" CO₂ bottle mounting bracket accepts any common bottle size.
- **Completely portable.** The compact size and weight of the Genie Super Hoist makes it possible for one person to move it quickly and effortlessly from job to job.
- **Auto-lubricating.** There is an oil reservoir on top of each piston inside the cylinder. This patented design ensures proper lubrication and helps prevent the lubricating oil from draining.
- Every part on the Genie Super Hoist is **completely serviceable.** Now, if you need to replace a seal, the job can be completed in minutes.
- **Built to last,** the Genie Super Hoist is constructed from heat-treated, extruded aluminium.

Accessories

- 20 lb (9 kg) CO₂ tank
- Platform cradle package

The Genie Super Hoist lifts, positions and installs:

- Metal and fibreglass air ducts
- Overhead sprinklers/plumbing
- Plasterboard and ceiling panels
- Forced air heaters/chillers
- Chimney pipe
- Electrical fixtures

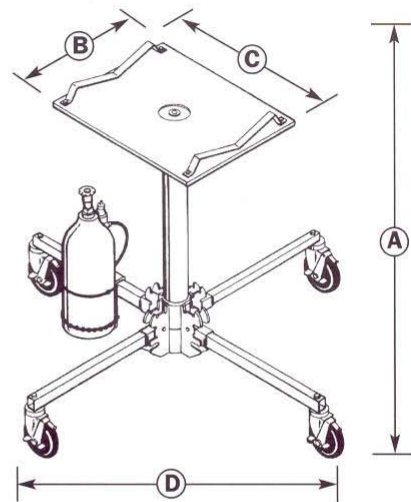

Specifications

Model	GH 3.8	
	Metric	US
Ⓐ Height	1.04 m	41 in
Ⓑ Platform length	48 cm	19 in
Ⓒ Platform width	61 cm	24 in
Ⓓ Base width		
corner-to-corner	1.35 m	53 in
Load capacity	136 kg	300 lb
Lifting height	3.8 m	12 ft 5 ⁵ / ₈ in
Dimensions for		
storage/transport	36 cm x 36 cm x 1 m	14 x 14 x 39 ¹ / ₂ in
Weight	29 kg	64 lb
Recommended psi	5.86 bar	85 psi
Model	GH 5.6	
	Metric	US
Ⓐ Height	1.37 m	54 in
Ⓑ Platform length	48 cm	19 in
Ⓒ Platform width	61 cm	24 in
Ⓓ Base width		
corner-to-corner	1.35 m	53 in
Load capacity	113 kg	250 lb
Lifting height	5.6 m	18 ft 4 ¹ / ₂ in
Dimensions for		
storage/transport	36 cm x 36 cm x 1 m	14 x 14 x 39 ¹ / ₂ in
Weight	31 kg	69 lb
Recommended psi	5.86 bar	85 psi

Distributed By:

GENIE UNITED KINGDOM
The Maltings, Wharf Road
Grantham,
Lincs
NG31 6BH
Telephone +44 (0) 1476 584333
Fax +44 (0) 1476 584334
<http://www.genieindustries.com>

Genie Industries

GENIE UNITED STATES
18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone +1 425 881 1800
Fax +1 425 883 3475
<http://www.genieindustries.com>

For further information, please contact your local distributor or the Genie sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie Super Hoist Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie Super Hoist, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 1997 by Genie Industries. Genie and Super Hoist are Registered Trademarks of Genie Industries in the USA and many other countries. Genie is a Terex Company. Genie is the owner of US Patents: 5,099,748 and 5,076,521. AU 06.03 Part No 865007UK.