


Specifications

MODELS	GS™-2032		GS™-2632	
	Metric	US	Metric	US
Working height max*	8.10 m	26 ft	9.92 m	32 ft
A Platform height max	6.10 m	20 ft	7.92 m	26 ft
B Platform length - outside	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in
extended	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in
C Platform width - outside	81 cm	2 ft 8 in	79 cm	2 ft 7 in
Guardrail height: CE	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in
Roll-out platform extension	91 cm	3 ft	91 cm	3 ft
Toeboard height	15 cm	6 in	15 cm	6 in
Height - stowed: platform	99 cm	3 ft 3 in	1.16 m	3 ft 9.5 in
D solid rails-CE	2.13 m	7 ft	—	—
folding guardrails	2.13 m	7 ft	2.26 m	7 ft 5 in
rails folded	1.78 m	5 ft 10 in	1.91 m	6 ft 3 in
E Length - stowed	2.44 m	8 ft	2.44 m	8 ft
Length - extended	3.33 m	10 ft 11 in	3.33 m	10 ft 11 in
F Width	81 cm	2 ft 8 in	81 cm	2 ft 8 in
G Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
H Ground clearance - centre	9 cm	3.5 in	9 cm	3.5 in
I with pothole guards deployed	2 cm	0.88 in	2 cm	0.88 in

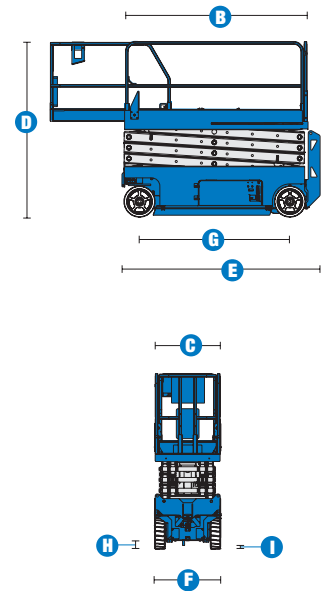


PRODUCTIVITY				
Lift capacity	363 kg	800 lbs	227 kg	500 lbs
Drive speed - stowed	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability**	30%		25%	
Turning radius - inside	zero	zero	zero	zero
Turning radius - outside	2.13 m	7 ft	2.13 m	7 ft
Raise / lower speed	30 / 26 sec	30 / 26 sec	37 / 24 sec	37 / 24 sec
Controls	proportional		proportional	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tyres - solid non-marking	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in

POWER				
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6V 225 Ah batteries)	
Hydraulic system capacity	28.4 L	7.5 gal	20.8 L	5.5 gal

WEIGHT***				
CE, AUS	1,825 kg	4,024 lbs	1,956 kg	4,313 lbs

STANDARDS COMPLIANCE	
CE EN280	

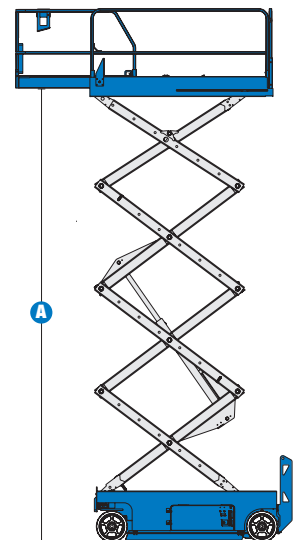

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 *** Weight will vary depending on options and/or country standards.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM OPTIONS

- 1.62 m (5 ft 4 in) steel platform (standard - GS™-2032)
- 2.26 m (7 ft 5 in) steel platform (standard - GS™-2632)
- 91 cm (3 ft) extension platform
- Solid rails (GS-2032)

POWER


- 24 V (four 6 V 225 Ah batteries)

DRIVE

- 2WD

TYRE

- Solid non-marking tyres

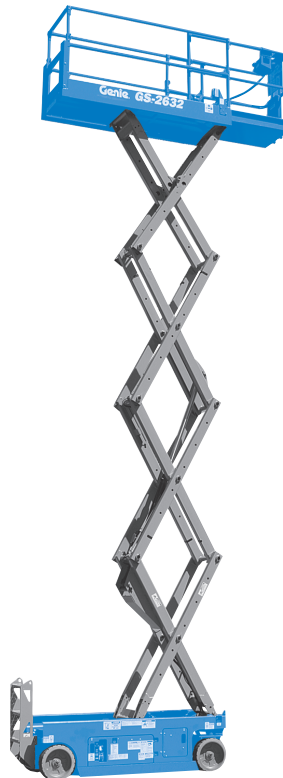

European Offices

UK

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

France

10, ZA de la Croix St. Mathieu
28320 Gallardon
France
Tel: +44 (0)2 37 26 09 99
Fax: +44 (0)2 37 26 09 98

Germany

Finienweg 3
28832 Achim/Bremen
Germany
Tel: +49 (0)4202 8852-0
Fax: +49 (0)4202 8852-20

Spain

Gaià 31, Pol. Ind. Plá d'en Coll
08110 Montcada i Reixac
Barcelona
Spain
Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia

Tagenevägen 72
425 37 Hisings Kärra
Sweden
Tel: +46 31 57 51 00
Fax: +46 31 57 90 20

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
USA
Tel: +1 425 881-1800
Fax: +1 425 883-3475

WEB: www.genieindustries.com
Email: infoeurope@genieind.com

STANDARD FEATURES

MEASUREMENTS

GS™-2032

- 8.10 m (26 ft) working height
- Up to 363 kg (800 lb) lift capacity

GS™-2632

- 9.92 m (32 ft) working height
- Up to 227 kg (500 lb) lift capacity

PRODUCTIVITY

- Folding rails with half height swing gate
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Electric horn
- Tilt level sensor
- Descent alarm
- Hour meter
- Multiple disc brakes
- Brakes release
- Emergency stop at both platform and ground controls
- Manual platform lowering valve
- Pothole guards
- Solid non-marking tyres
- Fully certified load sensor

POWER

- Automatic battery charger

OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Platform work lights
- Automotive horn
- Dual flashing beacons
- Ground controls cover
- Motion alarm

POWER

- Inverter
- Maintenance-free batteries
- EE rating

Distributed By: