

# Specifications




MODELS	GS™-2668 DC		GS™-3268 DC	
MEASUREMENTS	Metric	US	Metric	US
Working height*	9.92 m	32 ft	11.75 m	38 ft
<b>A</b> Platform height	7.92 m	26 ft	9.75 m	32 ft
<b>B</b> Platform length - outside	2.51 m	8 ft 3 in	2.51 m	8 ft 3 in
extended	3.61 m	11 ft 10 in	3.61 m	11 ft 10 in
<b>C</b> Platform width - outside	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in
Roll-out platform extension	1.07 m	3 ft 6 in	1.07 m	3 ft 6 in
Toeboard height	15 cm	6 in	15 cm	6 in
Platform height - stowed	1.19 m	3 ft 10.75 in	1.31 m	4 ft 3.75 in
<b>D</b> Height - stowed	2.27 m	7 ft 5.5 in	2.40 m	8 ft 3 in
rails lowered	1.65 m	5 ft 5 in	1.78 m	5 ft 10 in
<b>E</b> Length - stowed	2.67 m	8 ft 9 in	2.67 m	8 ft 9 in
platform extended	3.75 m	12 ft 3.5 in	3.75 m	12 ft 3.5 in
<b>F</b> Width	1.73 m	5 ft 8 in	1.73 m	5 ft 8 in
<b>G</b> Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
<b>H</b> Ground clearance - centre	19 cm	7.5 in	19 cm	7.5 in

PRODUCTIVITY				
Lift capacity	567 kg	1,250 lbs	454 kg	1,000 lbs
Drive speed - stowed	4.8 km/h	3.0 mph	4.8 km/h	3.0 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability**	30%		25%	
Turning radius - inside	1.52 m	5 ft	1.52 m	5 ft
Turning radius - outside	3.68 m	12 ft 1 in	3.68 m	12 ft 1 in
Raise/lower speed	30/35 sec		50/37 sec	
Controls	proportional		proportional	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tyres - low profile turf	32 x 56 cm	12.5 x 22 in	32 x 56 cm	12.5 x 22 in
Tyres - non-marking	23 x 55 cm	9 x 21.5 in	23 x 55 cm	9 x 21.5 in

POWER				
Power source	48 V DC (eight 350 Ah batteries)		48 V DC (eight 350 Ah batteries)	
Hydraulic system capacity	36 L	9.5 gal	36 L	9.5 gal

WEIGHT***				
	2,986 kg	6,583 lbs	3,425 kg	7,550 lbs

STANDARDS COMPLIANCE	CE EN280
----------------------	----------

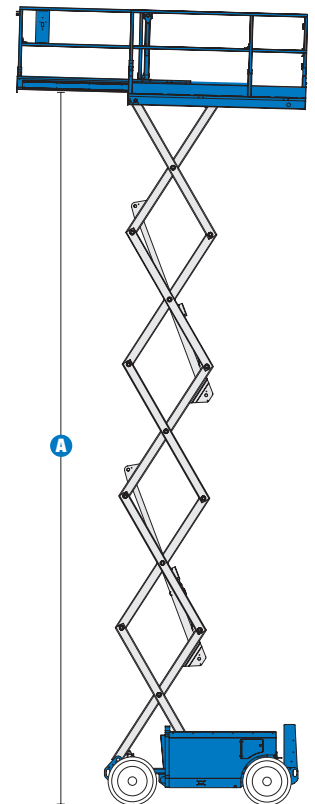

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\* Weight varies depending on options and country standards.

## Features

### EASILY CONFIGURED TO MEET YOUR NEEDS

#### PLATFORM

- Steel platform (standard) 2.51 m x 1.55 m (8 ft 3 in x 5 ft 1 in)
- 1.07 m (3 ft 6 in) extension platform

#### POWER

- 48 V DC system (eight 350 Ah batteries)

#### DRIVE

- 2WD

#### TYRE OPTIONS

- Low profile turf tyres (standard)
- Solid non-marking tyres

### STANDARD FEATURES

#### MEASUREMENTS

##### GS™-2668DC

- 9.92 m (32 ft) working height
- Up to 567 kg (1,250 lb) lift capacity

##### GS™-3268DC

- 11.75 m (38 ft) working height
- Up to 454 kg (1,000 lb) lift capacity

#### PRODUCTIVITY

- 1.07 m (3 ft 6 in) slide-out extension deck
- Proportional lift and drive
- Onboard diagnostic system
- Folding guardrails
- Full height swing gate
- Diamond plate deck
- AC power to platform
- Electric horn
- Tilt sensor with audible alarm
- Descent alarm
- Hour meter
- Dual wheel disc brakes
- Manual brake release
- Manual platform lowering valve
- Low profile turf tyres
- Lanyard attachment points
- Fully certified load sensor

#### POWER

- 48 V DC system (eight 350 Ah batteries)



### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Air line to platform
- Platform work lights
- Pipe cradle (pair)
- Dual flashing beacons
- Motion alarm
- Solid non-marking tyres

#### POWER

- Power inverter (110 V / 60 HZ)
- Power inverter (230 V / 50 Hz)

**Distributed By:**

### European Offices

#### UK

The Maltings  
Wharf Road  
Grantham NG31 6BH  
UK  
Tel: +44 (0)1476 584333  
Fax: +44 (0)1476 584334

#### France

10, ZA de la Croix St. Mathieu  
28320 Gallardon  
France  
Tel: +44 (0)2 37 26 09 99  
Fax: +44 (0)2 37 26 09 98

#### Germany

Finienweg 3  
28832 Achim/Bremen  
Germany  
Tel: +49 (0)4202 8852-0  
Fax: +49 (0)4202 8852-20

#### Spain

Gaià 31, Pol. Ind. Plá d'en Coll  
08110 Montcada i Reixac  
Barcelona  
Spain  
Tel: +34 93 572 50 90  
Fax: +34 93 572 50 91

#### Scandinavia

Tagenevägen 72  
425 37 Hisings Kärra  
Sweden  
Tel: +46 31 57 51 00  
Fax: +46 31 57 90 20

### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730  
USA  
Tel: +1 425 881-1800  
Fax: +1 425 883-3475

**WEB:** [www.genieindustries.com](http://www.genieindustries.com)  
**Email:** [infoeurope@genieind.com](mailto:infoeurope@genieind.com)